HP LaserJet Enterprise P3010 Printer series





Get fast, high performance printing with advanced security features and expand with your changing business needs. Ideal for businesses that need to print high volumes and confidential documents on a variety of media types.

Ideal for the IT or department manager in managed office environments, particularly in security-focused businesses, such as legal firms and government agencies, supporting small work teams of 8-10 users that require fast, high quality, output.

Count on HP for performance and durability.


Get output quickly with print speeds up to 40 ppm A4 and a first page out as fast as 7.5 seconds. Instant-on Technology provides up to a 50 percent faster warm-up time from low-power mode¹ and up to 50 percent energy savings over competitive models². Quickly process and share large, complex files with a 540 MHz processor, up to 640 MB expandable memory, and gigabit networking³. All-in-one Original HP print cartridges with built-in intelligence deliver consistently outstanding results.

Get peace of mind with advanced security features.

Control network access with 802.1X which allows device authentication prior to network admission and gives you more unified control. Secure business-critical data with support for IPv4 and IPv6 protocols³ and IPSec with encryption accelerator assist for fast authentication and point-to-point encryption across your IP network. Easily retrieve stored confidential print jobs using the menu and key pad on the control panel. Protect sensitive data: add a secure hard disk⁴ to the open EIO slot.

Gain the flexibility to expand with your business.

Extend your printer's capabilities as your business needs change with an open EIO slot and three host Hi-Speed USB 2.0 ports. Add memory up to 512 MB, for total memory of up to 640 MB. Improve your productivity with a 1,600-sheet maximum input capacity⁵. Add an optional 500-sheet paper tray⁴ for better media handling. Meet your business needs with robust paper handling: automatically print on different types and sizes of media up to A6, with easy-to-load, adjustable paper trays.



² Results are based on internal HP testing using the ENERGY STAR® program's Typical Electricity Consumption (TEC) method Test data was extended to one year Testing was on a single unit of each product Individual product configuration will affect power consumption



HP LaserJet Enterprise P3015 Printer



HP LaserJet Enterprise P3015d Printer



HP LaserJet Enterprise P3015dn Printer



HP LaserJet Enterprise P3015x Printer

³ Available with dn and x models only


⁴ Not included, please purchase separately

⁵ The P3015d and dn models have a 600-sheet standard input capacity, two 500-sheet trays may be added; x model has an 1 100-sheet standard input capacity, an additional 500-sheet tray can be added.

Product walkground

HP LaserJet P3015X printer shown

- 1. Intuitive control panel with four-line LCD display, 10-number key pad, and "Show-Me-How" menu
- 2. 250-sheet top output bin
- 3. One-door access to the easy-to-install print cartridge
- 4. 100-sheet multipurpose tray handles a variety of special
- 5. Two 500-sheet input trays for a 1,100-sheet total input capacity
- 6. Hardware integration pocket for connecting optional HP or partner solutions
- 7. Host USB 2.0 port for walk-up USB printing
- 8. HP Jetdirect 10/100/1000 Ethernet embedded print server 9. 128 MB memory expandable to 640 MB, and a 540 MHz
- processor 10. One open EIO slot
- 11. Hi-Speed USB 2.0 port for direct connection to printer
- 12. 100-sheet straight-through path supports special papers
- 13. Built-in automatic two-sided printing

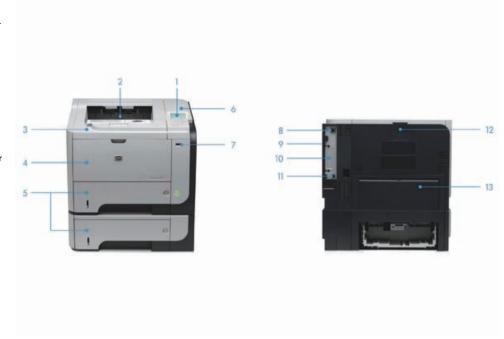

Series at a glance



HP LaserJet Enterprise P3015 Printer

- HP LaserJet P3015: print speed of up to 40 ppm
- 96 MB (max 608 MB)
- 540 MHz processor
- up to 1200 x 1200 dpi
- standard input capacity of 600 sheets with 100-sheet multipurpose tray (Tray 1) and one 500-sheet input tray (Tray 2)
- recommended monthly print volume 1500 to 5000 pages
- duty cycle up to 100000 pages



HP LaserJet Enterprise P3015d Printer

- HP LaserJet P3015d: print speed of up to 40 ppm
- 128 MB RAM (max 640 MB)
- 540 MHz processor
- up to 1200 x 1200 dpi
- standard input capacity of 600 sheets with 100-sheet multipurpose tray (Tray 1) and one 500-sheet input tray (Tray 2)
- recommended monthly print volume 1500 to 5000 pages
- duty cycle up to 100000 pages
- automatic duplex printing & a 10-number key pad



HP LaserJet Enterprise P3015dn Printer HP LaserJet Enterprise P3015x Printer

• HP LaserJet P3015dn: as d model with HP Jetdirect Gigabit Ethernet embedded print server



• HP LaserJet P3015x: as dn model plus a 500-sheet input tray for a 1100-sheet total input capacity

Recommended accessories



CE530A HP LaserJet 500-sheet Feeder/Tray

Feeder/Tray
Enhance productivity with a simple-to-install paper tray that allows you to print more pages without reloading paper and keep two different types of paper loaded.



CE981A HP Hardware Integration Pocket Cable This HP Hardware Integration Pocket Cable offers the opportunity to easily integrate optional security solutions like security card swipe and

authentication devices.



CE483A
HP 512 MB 144-pin x32
DDR2 DIMM
Improve printing
performance of complex
documents by enhancing
data flow with HP memory
upgrades.



J8019A HP Secure High Performance

EIO Hard Disk
Securing your business
means protecting
information. With the HP
High-Performance Secure
EIO Hard Disk with a
Kensington-style lock, you
can easily help secure
valuable data at rest on your
HP printer or MFP and still
achieve optimal
performance.



J7972G HP 1284B Parallel Card Giving you the flexibility to continue to support parallel devices, the HP 1284B Parallel Card is a parallel port interface for compatible HP peripherals. The card fits easily into an open EIO slot

of the peripheral.



J8007G
HP Jetdirect 690n IPv6/IPSec 802.11g Wireless Print
Server
The HP Jetdirect 690n
Wireless 802.11g Print
Server provides both wireless or wired connectivity. Get advanced authentication and encryption through
IPsec. Enjoy broad compatibility, robust security and easy management in the IT environment.

HP Global Solutions Catalogue

HP Global Solutions partners deliver and integrate a wide range of business printing solutions: Products can be mixed, matched and customized.

Solutions include: E-forms and stationery, Barcodes and cheque printing (OCR and MICR), Printing from SAP R/3 and ERP packages, Secure printing, Host printing, Cost-controlled printing and copying, Print job accounting and special industry solutions. Go to www.hp.com/eur/gsc for more information.

Ordering information



HP LaserJet Enterprise P3015 Printer (CE525A)

Printer, right-angled power cord, control panel overlay, software and documentation on CD-ROM, print Cartridge CE255A, Getting Started Guide, support flyer



HP LaserJet Enterprise P3015d Printer (CE526A)

Printer, right-angled power cord, control panel overlay, software and documentation on CD-ROM, print Cartridge CE255A, Getting Started Guide, support flyer



HP LaserJet Enterprise P3015dn Printer (CE528A)

Printer, right-angled power cord, control panel overlay, software and documentation on CD-ROM, print Cartridge CE255A, Getting Started Guide, support flyer



HP LaserJet Enterprise P3015x Printer (CE529A)

Printer, 500-sheet Feeder/Tray, right-angled power cord, control panel overlay, software and documentation on CD-ROM, print Cartridge CE255A, Getting Started Guide, support flyer

Accessories, Supplies and Support

HP LaserJet 500-sheet Feeder/Tray
HP 512 MB 144-pin x32 DDR2 DIMM
HP Secure High Performance EIO Hard Disk
HP 1284B Parallel Card
HP 64 MB 144-pin x32 DDR2 DIMM
HP 128 MB 144-pin x32 DDR2 DIMM
HP 256 MB 144-pin x32 DDR2 DIMM
HP LaserJet CE255X Black Print Cartridge Average cartridge yields 12,500 standard pages. Declared yield value in accordance with ISO/IEC 19752*
HP LaserJet CE255A Black Print Cartridge Average cartridge yields 6000 standard pages. Declared yield value in accordance with ISO/IEC 19752*

	Decidred yield value in accordance with 15071EC 19752*
Connectivit	у
CE981A	HP Hardware Integration Pocket Cable
J8007G	HP Jetdirect 690n IPv6/IPSec 802.11g Wireless Print
	Server
J7961G	HP Jetdirect 635n IPv6/IPsec Print Server
J7934G	HP Jetdirect 620n Fast Ethernet Print Server
J8021A	HP Jetdirect ew2500 802.11b/g Wireless Print Server

Service & support

UP872E HP Care Pack, Next-Business-Day LaserJet P3015
Hardware Support, 3 years
UP874E HP Care Pack, Next-Business-Day LaserJet P3015
Hardware Support, 4 years
UP876E HP Care Pack, Next-Business-Day LaserJet P3015
Hardware Support, 5 years
UP439PE HP Care Pack, Post Warranty Next-Business-Day LaserJet P3015 Hardware Support, 1 year

For a complete list of supplies, accessories and services, please refer to http://www.hp.com

Technical specifications

Print technology	Monochrome Laser	Monochrome Laser				
Print speed	A4 black: Up to 40	0 ppm				
•	First page out Black: As fast as 7.5 sec (from ready mode)					
	Exact speed varies depending on the system configuration, software application, and document complexity.					
Processor	540 MHz, Motorola ColdFire® V5					
Memory			P3015x: 128 MB; P3015: Expandable to 608 MB through 1 i			
			I-pin DIMM slot; P3015dn: Expandable to 640 MB through 1 i	industry standard 144-pin DIMM slot; P3015x:		
	Expandable to 640 MB through 1 industry standard 144-pin DIMM slot					
Print resolution	Up to 1200 x 120	•				
Print quality	1.7	HP FastRes 1200, HP ProRes 1200				
Printer languages		L 6, HP Postscript level 3 emulation, dir				
conomical printing			r print job due to instant-on fuser technology (saves electricity),			
Typefaces/fonts		font set (plus Greek, Hebrew, Cyrillic, A	Arabic); PS: 93 internal font set (plus Greek, Hebrew, Cyrillic, A	Arabic)		
Recommended Monthly Page Volume	1500 to 5000					
Duty cycle (monthly, A4)	Up to 100000 pages					
Print margins		mm, right: 5 mm, bottom: 6 mm	w.t.	6.		
Media handling	Input	Capacity	Weight	Size		
	Tray 1	sheets: 100, envelopes: 10, transp	parencies: 75 60 to 199 g/m² (straight-through paper path for special media)	A4, A5, A6, B5 (JIS), envelopes, letter, legal,		
	Tray 2	sheets: 500	60 to 120 g/m ²	executive; 76 x 127 to 216 x 356 mm A4, A5, A6, B5 (JIS), letter, legal, executive;		
	nuy Z	3.13613. 300	00 10 120 g/ III	105 x 148 to 216 x 356 mm		
	Tray 3*/Tray 4**	sheets: 500	60 to 120 g/m²	A4, A5, A6, B5 (JIS), letter, legal, executive; 105 x 148 to 216 x 356 mm		
	Output:	Sheets: Up to 250 Envelopes:Up to	o 10. Transparencies: Up to 75; 250-sheet output bin, 100-she			
	Duplex printing:	Automatic (standard)	o to. Hansparences. op 10 75, 250 slicer output bill, 100 slic	istredi oupur siir		
Media types		ur, letterhead, plain, preprinted, prepur	nched, recycled, rough), envelopes, labels, cardstock, transpare	encies, user-defined		
nterface and connectivity			ernal Accessory ports for HP and partner solutions, 1 EIO slot; I			
	internal Accessory ports for HP and partner solutions, 1 EIO slot; P3015dn: 1 HP Jetdirect 10/100/1000 Base-TX Ethernet embedded print server, 1 Hi-Speed USB 2.0, 1 external Host USB, 2 internal Accessory ports for HP and partner solutions, 1 EIO slot; P3015x: 1 HP Jetdirect 10/100/1000 Base-TX Ethernet embedded print server, 1 Hi-Speed USB 2.0, 1 external Host USB, 2 internal Accessory ports for HP and partner solutions, 1 EIO slot; optional: HP Jetdirect EIO internal print servers, HP Jetdirect					
	Hi-Speed USB 2.0,	2 internal Accessory ports for HP and 1 external Host USB, 2 internal Acces	l partner solutions, 1 EIO slot; P3015x: 1 HP Jetdirect 10/100, ssory ports for HP and partner solutions, 1 EIO slot; optional: H	/1000 Base-TX Ethernet embedded print server, 1		
	Hi-Speed USB 2.0, external print serve	2 internal Accessory ports for HP and 1 external Host USB, 2 internal Accesers, HP 802.11b/g wireless print serve	partner solutions, 1 EIO slot; P3015x: 1 HP Jetdirect 10/100, ssory ports for HP and partner solutions, 1 EIO slot; optional: H rs, HP EIO Parallel Port Adaptor	/1000 Base-TX Ethernet embedded print server, 1 IP Jetdirect EIO internal print servers, HP Jetdirect		
Operating systems compatibility	Hi-Speed USB 2.0, external print serve Microsoft® Windo NetWare; RED HA	2 internal Accessory ports for HP and 1.1 external Host USB, 2 internal Acces sers, HP 802.11b/g wireless print servei wss® 2000 (SP4), XP Home, XP Profess vi Linux 7.x or higher; SUSE Linux 8.x or	l partner solutions, 1 EIO slot; P3015x: 1 HP Jetdirect 10/100, ssory ports for HP and partner solutions, 1 EIO slot; optional: H	/1000 Base-TX Ethernet embedded print server, 1 IP Jetdirect EIO internal print servers, HP Jetdirect ic OS X v10.3.9, v10.4.3, v10.5, v 10.6; Novell®		
, .	Hi-Speed USB 2.0, external print serve Microsoft® Windo NetWare; RED HA Optional: Microsoft® Windo with Microsoft® W SUSE Linux 8.x or	2 internal Accessory ports for HP and 1 external Host USB, 2 internal Accessors, HP 802.11b/g wireless print server ws® 2000 (SP4), XP Home, XP Profess tf Linux 7.x or higher; SUSE Linux 8.x or ff® Windows® 2000, XP Home, XP Pr ws® 2000, Server 2003, Server 2008 /indows® 2003, XP, Server 2008; Wir	partner solutions, 1 EIO slot; P3015x: 1 HP Jetdirect 10/100, ssory ports for HP and partner solutions, 1 EIO slot; optional: Hrs, HP EIO Parallel Port Adaptor sional, Server 2003, Server 2008; Windows Vista®, x64; Ma pr higher; Linux (see http://www.hplip.net) of linux (see http://www.hplip.net) of linux (see http://www.hplip.net) stata®; OS/2; UNIX,; Linux (see http://www.hplip.net) home, XP Professional, 2003 64-bit, 2008 64-bit, XP 64 ndows Vista®; Novell® 5.1 or higher; Mac OS X v10.3, v10.et); HP-UX 10.20, 11.x, 11.i; Solaris® 2.5 or higher (SPARC®)	/1000 Base-TX Ethernet embedded print server, 1 IP Jetdirect EIO internal print servers, HP Jetdirect IC OS X v10.3.9, v10.4.3, v10.5, v 10.6; Novell® www.hplipopensource.com); HP OpenVMS -bit; Windows Vista®, 64-bit (For IPv6 compatible .4, v10.5 or higher; RED HAT Linux 7.x or higher;		
Network operating systems compatibility	Hi-Speed USB 2.0, external print serve Microsoft® Windo NetWare; RED HA Optional: Microsoft® Windo with Microsoft® W SUSE Linux 8.x or Citrix® MetaFrame Management Secu	2 internal Accessory ports for HP and .1 external Host USB, 2 internal Accessers, HP 802.11b/g wireless print servers, HP 802.000 (SP4), XP Home, XP Profess IT Linux 7.x or higher; SUSE Linux 8.x of the Windows® 2000, XP Home, XP Provs. 2000, Server 2003, Server 2008; Windows® 2003, XP, Server 2008; Windows® 2003, XP, Server 2008; Windows® 1, Linux (see http://www.hplip.ne Server; Windows® Terminal Services	partner solutions, 1 EIO slot; P3015x: 1 HP Jetdirect 10/100, ssory ports for HP and partner solutions, 1 EIO slot; optional: Hrs, HP EIO Parallel Port Adaptor sional, Server 2003, Server 2008; Windows Vista®, x64; Ma or higher; Linux (see http://www.hplip.net) rofessional; Windows Vista®; OS/2; UNIX; Linux (see http://s8, XP Home, XP Professional, 2003 64-bit, 2008 64-bit, XP 64 ndows Vista®); Novell® 5.1 or higher; Mac OS X v10.3, v10. et); HPUX 10.20, 11.x, 11.i; Solaris® 2.5 or higher (SPARC®) raticalism (EAP-PEAP, EAP-TLS), IPP over TLS, IPsec/Firewall with	/1000 Base-TX Ethernet embedded print server, 1 HP Jetdirect EIO internal print servers, HP Jetdirect ic OS X v10.3.9, v10.4.3, v10.5, v 10.6; Novell® www.hplipopensource.com); HP OpenVMS -bit; Windows Vistar®, 64-bit (For IPv6 compatible .4, v10.5 or higher; RED HAT Linux 7.x or higher; o systems only); IBM® AIX 3.2.5 or higher; MPE-iX;		
Network operating systems compatibility Security management	Hi-Speed USB 2.0, external print serve Microsoft® Windo NetWare; RED HA Optional: Microsoft® Windo with Microsoft® W SUSE Linux 8.x or Citrix® MetaFrame Management Secu Kerberos Authentic Microsoft® Windo	2 internal Accessory ports for HP and .1 external Host USB, 2 internal Accessor, HP 802.11b/g wireless print serveinses, HP 802.11b/g wireless print serveinses 2000 (SP4), XP Home, XP Profess T Linux 7.x or higher; SUSE Linux 8.x of the Windows® 2000, XP Home, XP Provs® 2000, Server 2003, XP Server 2008; Windows® 2003, XP, Server 2008; Winhigher; Linux (see http://www.hplip.ne.aserver; Windows® Terminal Services prity: SNMPv3, SSL/TLS, 802.1X authentation. Support for WJA-10 IPsec Confirms® 2000 (SP4), XP, Server 2003; W. 10.3.9; v 10.4.3; v 10.5; v 10.6; 20	partner solutions, 1 EIO slot; P3015x: 1 HP Jetdirect 10/100, ssory ports for HP and partner solutions, 1 EIO slot; optional: Hrs, HP EIO Parallel Port Adaptor sional, Server 2003, Server 2008; Windows Vista®, x64; Ma or higher; Linux (see http://www.hplip.net) rofessional; Windows Vista®; OS/2; UNIX; Linux (see http://s8, XP Home, XP Professional, 2003 64-bit, 2008 64-bit, XP 64 ndows Vista®); Novell® 5.1 or higher; Mac OS X v10.3, v10. et); HPUX 10.20, 11.x, 11.i; Solaris® 2.5 or higher (SPARC®) raticalism (EAP-PEAP, EAP-TLS), IPP over TLS, IPsec/Firewall with	/1000 Base-TX Ethernet embedded print server, 1 HP Jetdirect EIO internal print servers, HP Jetdirect IC OS X v10.3.9, v10.4.3, v10.5, v 10.6; Novell® www.hplipopensource.com); HP OpenVMS I-bit; Windows Vista®, 64-bit (For IPv6 compatible .4, v10.5 or higher; RED HAT Linux 7.x or higher; systems only); IBM® AIX 3.2.5 or higher; MPE-IX; IC Certificate, Pre-Shared Key Authentication, and port or IEEE 1284-4 compliant parallel port; CD-RO		
Network operating systems compatibility Security management Minimum system requirements	Hi-Speed USB 2.0, external print serve Microsoft® Windo NetWare; RED HA Optional: Microsoft® Windo with Microsoft® W SUSE Linux 8.x or Citrix® MetaFrame Management Secu Kerberos Authentic Microsoft® Windo drive, Mac OS X v parallel port; CD-R	2 internal Accessory ports for HP and .1 external Host USB, 2 internal Accessors, HP 802.11b/g wireless print servers, HP 802.000 (SP4), XP Home, XP Profess T Linux 7.x or higher; SUSE Linux 8.x of the Windows® 2000, XP Home, XP Provs. 2000, Server 2003, Server 2008; Windows® 2003, XP, Server 2008; Windows® 2003, XP, Server 2008; Windows® 2003, XP, Server 2008; Windows® Terminal Services virity: SNMPv3, SSL/TLS, 802.1X autheration. Support for WJA-10 IPsec Confirms 8 2000 (SP4), XP, Server 2003; Windows® 2000 (SP4), XP,	partner solutions, 1 EIO slot; P3015x: 1 HP Jetdirect 10/100, ssory ports for HP and partner solutions, 1 EIO slot; optional: Hrs, HP EIO Parallel Port Adaptor sional, Server 2003, Server 2008; Windows Vista®, x64; Ma or higher; Linux (see http://www.hplip.net) rofessional; Windows Vista®; OS/2; UNIX; Linux (see http://ws., XP Home, XP Professional, 2003 64-bit, 2008 64-bit, XP 64 ndows Vista®); Novell® 5.1 or higher; Mac OS X v10.3, v10.et); HP-UX 10.20, 11.x, 11.i; Solaris® 2.5 or higher (SPARC® on this of the control of th	/1000 Base-TX Ethernet embedded print server, 1 HP Jetdirect EIO internal print servers, HP Jetdirect IC OS X v10.3.9, v10.4.3, v10.5, v 10.6; Novell® IC OS X v10.5, v10.5, v10.5, v10.5, v 10.6; Novell® IC OS X v10.5, v		
Network operating systems compatibility Security management Minimum system requirements	Hi-Speed USB 2.0, external print serve Microsoft® Windo NetWare; RED HA Optional: Microsoft® Windo with Microsoft® W SUSE Linux 8.x or Citrix® MetaFrame Management Secu Kerberos Authentic Microsoft® Windo drive, Mac OS X v parallel port; CD-R EVO Discrete PCL of the serve Microsoft® Control PCL of the serve Microsoft® Windo drive, Mac OS X v parallel port; CD-R	2 internal Accessory ports for HP and .1 external Host USB, 2 internal Accessor, PR 20.11b/g wireless print servers, HP 802.11b/g wireless print server wss® 2000 (SP4), XP Home, XP Profess T Linux 7.x or higher; SUSE Linux 8.x of the Windows® 2000, XP Home, XP Pross 2000, Server 2003, Server 2008; Windows® 2003, XP, Server 2008; Windows® 2003, XP, Server 2008; Windows® 2000, SP, Server 2008; Windows® Terminal Services writy: SNMPv3, SSL/TLS, 802.1X autheration. Support for WJA-10 IPsec Confirms® 2000 (SP4), XP, Server 2003; Windows® 2000 (SP4), XP, Server 20	partner solutions, 1 EIO slot; P3015x: 1 HP Jetdirect 10/100, ssory ports for HP and partner solutions, 1 EIO slot; optional: Hrs, HP EIO Parallel Port Adaptor sional, Server 2003, Server 2008; Windows Vista®, x64; Ma or higher; Linux (see http://www.hplip.net) rofessional; Windows Vista®, CS/2; UNIX,; Linux (see http://w8, XP Home, XP Professional, 2003 64-bit, 2008 64-bit, XP 64 ndows Vista®); Novell® 5.1 or higher; Mac OS X v10.3, v10.et); HP-UX 10.20, 11.x, 11.i; Solaris® 2.5 or higher (SPARC®) ntication (EAP- PEAP, EAP-TLS), IPP over TLS, IPsec/Firewall with guration using IPsec Plug-in/Indows Vista®, 200 MB available hard disk space; USB 2.0 p	/1000 Base-TX Ethernet embedded print server, 1 IP Jetdirect EIO internal print servers, HP Jetdirect IC OS X v10.3.9, v10.4.3, v10.5, v 10.6; Novell® IC OS X v10.3.9, v10.4.3, v10.5, v 10.5, v 10.6; Novell® IC OS X v10.5, v10.5, v10.5, v 10.5, v 10		
Network operating systems compatibility Security management Minimum system requirements Software Control panel	Hi-Speed USB 2.0, external print serve Microsoft® Windo NetWare; RED HA Optional: Microsoft® Windo with Microsoft® W SUSE Linux 8.x or Citrix® MetaFrame Management Secu Kerberos Authentic Microsoft® Windo drive, Mac OS X v parallel port; CD-R EVO Discrete PCL (2.29 x 5.33 cm 4 Toggle up/down)	2 internal Accessory ports for HP and .1 external Host USB, 2 internal Accessor, PR 20.11b/g wireless print servers, HP 802.11b/g wireless print server wss® 2000 (SP4), XP Home, XP Profess T Linux 7.x or higher; SUSE Linux 8.x of the Windows® 2000, XP Home, XP Pross 2000, Server 2003, Server 2008; Windows® 2003, XP, Server 2008; Windows® 2003, XP, Server 2008; Windows® 2000, SP, Server 2008; Windows® Terminal Services writy: SNMPv3, SSL/TLS, 802.1X autheration. Support for WJA-10 IPsec Confirms® 2000 (SP4), XP, Server 2003; Windows® 2000 (SP4), XP, Server 20	partner solutions, 1 EIO slot; P3015x: 1 HP Jetdirect 10/100, ssory ports for HP and partner solutions, 1 EIO slot; optional: Hrs, HP EIO Parallel Port Adaptor sional, Server 2003, Server 2008; Windows Vista®, x64; Ma or higher; Linux (see http://www.hplip.net) rofessional; Windows Vista®; OS/2; UNIX; Linux (see http://s8, XP Home, XP Professional, 2003 64-bit, 2008 64-bit, XP 64 ndows Vista®); Novell® 5.1 or higher; Mac OS X v10.3, v10.et); HPUX 10.20, 11.x, 11.i; Solaris® 2.5 or higher (SPARC®); Intication (EAP. PEAP, EAP-TLS), IPP over TLS, IPsec/Firewall with guration using IPsec Plug-in Vindows Vista®, 200 MB available hard disk space; USB 2.0 p. 10 MB available hard d	/1000 Base-TX Ethernet embedded print server, 1 IP Jetdirect EIO internal print servers, HP Jetdirect IC OS X v10.3.9, v10.4.3, v10.5, v 10.6; Novell® IC OS X v10.3.9, v10.4.3, v10.5, v 10.5, v 10.6; Novell® IC OS X v10.5, v10.5, v10.5, v 10.5, v 10		
Network operating systems compatibility Security management Minimum system requirements Software Control panel	Hi-Speed USB 2.0, external print serve Microsoft® Windo NetWare; RED HA Optional: Microsoft® Windo with Microsoft® W SUSE Linux 8.x or Citrix® MetaFrame Management Secu Kerberos Authentic Microsoft® Windo drive, Mac OS X v parallel port; CD-R EVO Discrete PCL 0.29 x 5.33 cm 4 Toggle up/down) HP Web Jetadmin, Requirements: Inpu	2 internal Accessory ports for HP and .1 external Host USB, 2 internal Accessor, HP 802.11b/g wireless print server srs, HP 802.11b/g wireless print server wss® 2000 (SP4), XP Home, XP Profess II Linux 7.x or higher; SUSE Linux 8.x of the Windows® 2000, XP Home, XP Pross. 2000, Server 2003, Server 2008; Windows® 2000, XP, Server 2008; Winhigher; Linux (see http://www.hplip.ne. Server; Windows® Terminal Services wirity: SNMPv3, SSL/TLS, 802.1X autheration. Support for WJA-10 IPsec Conficustion. Support for WJA-10 IPsec Conficus Server. 2000 (SP4), XP, Server 2003; W. 10.3.9; v 10.4.3; v 10.5; v 10.6; 20 (CM drive 6 (based on EVO 4.7); Product specific line LCD display, 3 light-emitting diode. HP LaserJet Utility, HP Embedded Webt voltage: 100 to 127 VAC (+/- 10%),	partner solutions, 1 EIO slot; P3015x: 1 HP Jetdirect 10/100, ssory ports for HP and partner solutions, 1 EIO slot; optional: Hrs, HP EIO Parallel Port Adaptor sional, Server 2003, Server 2008; Windows Vista®, x64; Ma or higher; Linux (see http://www.hplip.net) rofessional; Windows Vista®; OS/2; UNIX; Linux (see http://ws., XP Home, XP Professional, 2003 64-bit, 2008 64-bit, XP 64 ndows Vista®); Novell® 5.1 or higher; Mac OS X v10.3, v10. et); HPUX 10.20, 11.x, 11.i; Solaris® 2.5 or higher (SPARC®) rincitation (EAP PEAP, EAPTLS), IPP over TLS, IPsec/Firewall with guration using IPsec Plug-in (indows Vista®, 200 MB available hard disk space; USB 2.0 p. 10 MB available hard disk space; USB 2.0 p. 10 MB available hard disk space; USB (compatible with USB 2 c. Universal Print Drivers Postscript, static install (based on EVO e. (LED) indicator lights (Ready, Data, Attention), buttons (10 nut) b. Server, HP Easy Printer Care	/1000 Base-TX Ethernet embedded print server, 1 HP Jetdirect EIO internal print servers, HP Jetdirect IC OS X v10.3.9, v10.4.3, v10.5, v 10.6; Novell® www.hplipopensource.com); HP OpenVMS L-bit; Windows Vista®, 64-bit (For IPv6 compatible .4, v10.5 or higher; RED HAT Linux 7.x or higher; systems only); IBM® AIX 3.2.5 or higher; MPE-iX; a Certificate, Pre-Shared Key Authentication, and bort or IEEE 1284-4 compliant parallel port; CD-RO .0 specifications) port or IEEE 1284-B compliant 4.7) meric keys, Information, Return, Stop/Cancel, OK,		
Network operating systems compatibility Security management Minimum system requirements Software Control panel Printer management Power	Hi-Speed USB 2.0, external print serve Microsoft® Windo NetWare; RED HA Optional: Microsoft® Windo with Microsoft® W SUSE Linux 8.x or Citrix® MetaFrame Management Secu Kerberos Authentic Microsoft® Windo drive, Mac OS X v parallel port; CD-R EVO Discrete PCL 2.29 x 5.33 cm 4 Toggle up/down) HP Web Jetadmin, Requirements: Inpu watts (standy), 8.5 Out of package: P.	'2 internal Accessory ports for HP and .1 external Host USB, 2 internal Accessor, PR 20.11b/g wireless print server sers, HP 802.11b/g wireless print server wiss® 2000 (SP4), XP Home, XP Profess T Linux 7.x or higher; SUSE Linux 8.x of the Windows® 2000, XP Home, XP Pross 2000, Server 2003, Server 2008; Windows® 2003, XP, Server 2008; Windows® 2003, XP, Server 2008; Windigher; Linux (see http://www.hplip.ne. 2 Server; Windows® Terminal Services writy: SNMPv3, SSL/TLS, 802.1X autheration. Support for WJA-10 IPsec Configures 2000 (SP4), XP, Server 2003; Windows® 2000 (SP4), XP, Server 2003; Window	partner solutions, 1 EIO slot; P3015x: 1 HP Jetdirect 10/100, ssory ports for HP and partner solutions, 1 EIO slot; optional: Hrs, HP EIO Parallel Port Adaptor sional, Server 2003, Server 2008; Windows Vista®, x64; Ma or higher; Linux (see http://www.hplip.net) rofessional; Windows Vista®; OS/2; UNIX; Linux (see http://s8, XP Home, XP Professional, 2003 64-bit, 2008 64-bit, XP 64 ndows Vista®; Novell® 5.1 or higher; Mac OS X v10.3, v10.et); HP-UX 10.20, 11.x, 11.i; Solaris® 2.5 or higher (SPARC®) intication (EAP-PEAP, EAP-TLS), IPP over TLS, IPsec/Firewall with a guration using IPsec Plug-in Vindows Vista®, 200 MB available hard disk space; USB 2.0 p. 20 MB available hard disk space; USB 2.0 p. 20 MB available hard disk space; USB 2.0 p. 20 Universal Print Drivers Postscript, static install (based on EVO-te (LED) indicator lights (Ready, Data, Attention), buttons (10 nut) b Server, HP Easy Printer Care	/1000 Base-TX Ethernet embedded print server, 1 HP Jetdirect EIO internal print servers, HP Jetdirect IC OS X v10.3.9, v10.4.3, v10.5, v 10.6; Novell® IC OS X v10.3.9, v10.4.3, v10.5, v 10.6; Novell® IC OS X v10.3.9, v10.4.3, v10.5, v 10.6; Novell® IC OS X v10.3.9, v10.4.3, v10.5, v 10.6; Novell® IC OS X v10.3.9, v10.4.3, v10.5, v 10.6; Novell® IC OS X v10.3.9, v10.4.3, v10.5, v 10.6; Novell® IC OS X v10.3.9, v10.4.3, v10.5, v 10.6; Novell® IC OS X v10.3.9, v10.4.3, v10.5, v 10.6; Novell® IC OS X v10.3.9, v10.4.3, v10.5, v 10.6; Novell® IC OS X v10.3.9, v10.4.3, v10.5, v 10.6; Novell® IC OS X v10.3.9, v10.4.3, v10.5, v 10.6; Novell® IC OS X v10.3.9, v10.4.3, v10.5, v 10.6; Novell® IC OS X v10.3.9, v10.4.3, v10.5, v 10.6; Novell® IC OS X v10.3.9, v10.4.3, v10.5, v 10.6; Novell® IC OS X v10.3.9, v10.4.3, v10.5, v 10.6; Novell® IC OS X v10.3.9, v10.4.3, v10.5, v 10.6; Novell® IC OS X v10.3.9, v10.4.3, v10.5, v 10.6; Novell® IC OS X v10.3.9, v10.4.3, v10.5, v 10.6; Novell® IC OS X v10.3.9, v10.4.3, v10.5, v 10.5, v 10.6; Novell® IC OS X v10.3.9, v10.4.3, v10.5, v 10.5, v 10.5, v 10.6; Novell® IC OS X v10.3.9, v10.4.3, v10.5, v 10.5, v 1		
Network operating systems compatibility Security management Minimum system requirements Software Control panel Printer management Power Dimensions (w x d x h)	Hi-Speed USB 2.0, external print serve Microsoft® Windo NetWare; RED HA Optional: Microsoft® Windo with Microsoft® W SUSE Linux 8.x or Citrix® MetaFrame Management Secu Kerberos Authentic Microsoft® Windo drive, Mac OS X v parallel port; CD-R EVO Discrete PCL (2.29 x 5.33 cm 4 Toggle up/down) HP Web Jetadmin, Requirements: Inpuwatts (standy), 8.5 Out of packages: P. Packaged: P3015: Out of packages: P.	'2 internal Accessory ports for HP and .1 external Host USB, 2 internal Accessor, PR 20.11b/g wireless print server sers, HP 802.11b/g wireless print server wiss® 2000 (SP4), XP Home, XP Profess T Linux 7.x or higher; SUSE Linux 8.x of the Windows® 2000, XP Home, XP Pross 2000, Server 2003, Server 2008; Windows® 2003, XP, Server 2008; Windows® 2003, XP, Server 2008; Windigher; Linux (see http://www.hplip.ne. 2 Server; Windows® Terminal Services writy: SNMPv3, SSL/TLS, 802.1X autheration. Support for WJA-10 IPsec Configures 2000 (SP4), XP, Server 2003; Windows® 2000 (SP4), XP, Server 2003; Window	partner solutions, 1 EIO slot; P3015x: 1 HP Jetdirect 10/100, ssory ports for HP and partner solutions, 1 EIO slot; optional: Hrs, HP EIO Parallel Port Adaptor sional, Server 2003, Server 2008; Windows Vista®, x64; Ma or higher; Linux (see http://www.hplip.net) rofessional; Windows Vista®; OS/2; UNIX; Linux (see http://s8, XP Home, XP Professional, 2003 64-bit, 2008 64-bit, XP 64 ndows Vista®); Novell® 5.1 or higher; Mac OS X v10.3, v10. et); HP-UX 10.20, 11.x, 11.i; Solaris® 2.5 or higher (SPARC®); http://indows Vista®, 200 MB available hard disk space; USB 2.0 p. 20 MB available hard disk space; USB 2.0 p. 20 MB available hard disk space; USB 2.0 p. 20 MB available hard disk space; USB 2.0 p. 20 Cuniversal Print Drivers Postscript, static install (based on EVO-12 (LED) indicator lights (Ready, Data, Attention), buttons (10 nur.) b Server, HP Easy Printer Care 1. 50/6 Hz (+/- 2 Hz); 220 to 240 VAC (+/- 10%), 50/60 Hz; 24 48 x 412 x 316 mm; P3 15 dn; 448 x 412 x 316 mm; P3 15 dn; 500 x 439 mm; P3015dn: 600 x 500 x 439 mm; P3015x: 015dn: 15.9 kg; P3015x: 21.2 kg	/1000 Base-TX Ethernet embedded print server, 1 IP Jetdirect EIO internal print servers, HP Jetdirect IC OS X v10.3.9, v10.4.3, v10.5, v 10.6; Novell® IC OS X v10.3.9, v10.5, v10.5, v 10.5, v 10.5, v 10.6; Novell® IC OS X v10.5, v10.5, v 10.5, v 10.		
Network operating systems compatibility Security management Minimum system requirements Software Control panel Printer management Power Dimensions (w x d x h) Weight Operating environment	Hi-Speed USB 2.0, external print serve Microsoft® Windo NetWare; RED HA Optional: Microsoft® W SUSE Linux 8.x or Citrix® MetaFrame Management Secu Kerberos Authentic Microsoft® Windo drive, Mac OS X v parallel port; CD-R EVO Discrete PCL 2.29 x 5.33 cm 4 Toggle up/down) HP Web Jetadmin, Requirements: Inpuwatts (standy), 8.5 Out of package: Packaged: P3015: Operating tempero 70% RH. Storage t 48dB(A) in quiet m	'2 internal Accessory ports for HP and .1 external Host USB, 2 internal Accessory ports for HP and .1 external Host USB, 2 internal Accessor, HP 802.11b/g wireless print server sers, HP 802.11b/g wireless print server wiss® 2000 (SP4), XP Home, XP Profess T Linux 7.x or higher; SUSE Linux 8.x of the Windows® 2000, XP Home, XP Pross © 2000, Server 2003, Server 2008; Windows® 2003, XP, Server 2008; Windows® 2003, XP, Server 2008; Windows® 2000, Server; Windows® Terminal Services with: SNMPv3, SSL/TLS, 802.1X autheration. Support for WJA-10 IPsec Configure 2000 (SP4), XP, Server 2003; Windows® 2000	partner solutions, 1 EIO slot; P3015x: 1 HP Jetdirect 10/100, ssory ports for HP and partner solutions, 1 EIO slot; optional: Hrs, HP EIO Parallel Port Adaptor sional, Server 2003, Server 2008; Windows Vista®, x64; Ma or higher; Linux (see http://www.hplip.net) rofessional; Windows Vista®; OS/2; UNIX; Linux (see http://s8, XP Home, XP Professional, 2003 64-bit, 2008 64-bit, XP 64 ndows Vista®); Novell® 5.1 or higher; Mac OS X v10.3, v10.ett); HPUX 10.20, 11.x, 11.i; Solaris® 2.5 or higher (SPARC®); HPUX 10.20, 11.x, 11.i; Solaris® 2.5 or higher (SPARC®) and the second of the second o	/1000 Base-TX Ethernet embedded print server, 1 HP Jetdirect EIO internal print servers, HP Jetdirect IC OS X v10.3.9, v10.4.3, v10.5, v 10.6; Novell® www.hplipopensource.com); HP OpenVMS L-bit; Windows Vista®, 64-bit (For IPv6 compatible .4, v10.5 or higher; RED HAT Linux 7.x or higher; o systems only); IBM® AIX 3.2.5 or higher; MPE-iX; of Certificate, Pre-Shared Key Authentication, and port or IEEE 1284-4 compliant parallel port; CD-RO .0 specifications) port or IEEE 1284-B compliant 4.7) meric keys, Information, Return, Stop/Cancel, OK, Iz (+/- 2 Hz). Consumption: 780 watts (active), 14. 8015x: 448 x 412 x 480 mm 618 x 518 x 735 mm 10 80% RH. Recommended operating humidity: 30 ir: LwAd 6.8 B(A). Sound pressure: LpAm54 dB(A),		
Operating systems compatibility Network operating systems compatibility Security management Minimum system requirements Software Control panel Printer management Power Dimensions (w x d x h) Weight Operating environment	Hi-Speed USB 2.0, external print serve Microsoft® Windo NetWare; RED HA Optional: Microsoft® Windo with Microsoft® W SUSE Linux 8.x or Citrix® MetaFrame Management Secu Kerberos Authentic Microsoft® Windo drive, Mac OS X v parallel port; CD-R EVO Discrete PCL (2.29 x 5.33 cm 4 Toggle up/down) HP Web Jetadmin, Requirements: Inpuwatts (standy), 8.5 Out of package: Packaged: P3015: Out of package: Packaged: P3015: Operating temperc 70% RH. Storage t 48dB(A) in quiet m Safety certification:	2 internal Accessory ports for HP and .1 external Host USB, 2 internal Accessory ports for HP and .1 external Host USB, 2 internal Accessor, HP 802.11b/g wireless print server wss 2000 (SP4), XP Home, XP Profess IT Linux 7.x or higher; SUSE Linux 8.x of the Windows® 2000, XP Home, XP Prows® 2000, Server 2003, XP Former 2003; Windows® 2000, Server 2003; Winhigher; Linux (see http://www.hplip.ne server; Windows® Terminal Services prity: SNMPv3, SSL/TLS, 802.1X authoriation. Support for WJA-10 IPsec Confirmation. Support for MJA-10 IPsec Confirmation. Support for MJA-10 IPsec Confirmation. Support f	partner solutions, 1 EIO slot; P3015x: 1 HP Jetdirect 10/100, ssory ports for HP and partner solutions, 1 EIO slot; optional: Hrs, HP EIO Parallel Port Adaptor sional, Server 2003, Server 2008; Windows Vista®, x64; Ma or higher; Linux (see http://www.hplip.net) rofessional; Windows Vista®; OS/2; UNIX; Linux (see http://s8, XP Home, XP Professional, 2003 64-bit, 2008 64-bit, XP 64 ndows Vista®); Novell® 5.1 or higher; Mac OS X v10.3, v10. et); HP-UX 10.20, 11.x, 11.i; Solaris® 2.5 or higher (SPARC®) intication (EAP- PEAP, EAP-TLS), IPP over TLS, IPsec/Firewall with guration using IPsec Plug-in //indows Vista®, 200 MB available hard disk space; USB 2.0 p. 200 MB available hard disk space; USB (compatible with USB 2) c Universal Print Drivers Postscript, static install (based on EVO-10 (LED) indicator lights (Ready, Data, Attention), buttons (10 nur) b Server, HP Easy Printer Care 1, 50/60 Hz (+/- 2 Hz); 220 to 240 VAC (+/- 10%), 50/60 Hz (+/- 2 Hz); 220 to 240 VAC (+/- 10%), 50/60 Hz (+/- 2 Hz); 2316 mm; P3015dn: 448 x 412 x 316 mm; P3015dn: 448 x 412 x 316 mm; P3015dn: 448 x 412 x 316 mm; P3015dn: 15.9 kg; P3015x: 21.2 kg 19.9 kg; P3015x: 28.5 kg perating temperature: 15 to 32.5° C. Operating humidity: 10 to 10	/1000 Base-TX Ethernet embedded print server, 1 HP Jetdirect EIO internal print servers, HP Jetdirect IC OS X v10.3.9, v10.4.3, v10.5, v 10.6; Novell® www.hplipopensource.com); HP OpenVMSbit; Windows Vista®, 64-bit (For IPv6 compatible 4.4, v10.5 or higher; RED HAT Linux 7.x or higher; systems only); IBM® AIX 3.2.5 or higher; MPE-IX; IC Certificate, Pre-Shared Key Authentication, and port or IEEE 1284-4 compliant parallel port; CD-RO; O specifications) port or IEEE 1284-B compliant 4.7) meric keys, Information, Return, Stop/Cancel, OK, Iz (+/- 2 Hz). Consumption: 780 watts (active), 14.: 8015x: 448 x 412 x 480 mm 618 x 518 x 735 mm To 80% RH. Recommended operating humidity: 30 to r. LwAd 6.8 B(A). Sound pressure: LpAm54 dB(A), EN 60825-1+A1+A2 (Class 1 Laser/LED Device)		

^{*}standard on P3015x, optional on P3015d and dn $\,$

http://www.hp.com/uk















^{**}optional on all models